

**المواصفات الفنية الخاصة بالمناقصة العامة**

**رقم المناقصة : (٢٠١٢/٢٨)**

**الخاصة بشراء وتوريد (٤٠٠٠) لفة دروب واير اسود**

---

**المؤسسة العامة للاتصالات السلكية واللاسلكية**

**الإدارة العامة للمشتريات والمخازن**

**إدارة المشتريات - قسم العقود والمناقصات**

# REPUBLIC OF YEMEN

*Ministry of Telecommunication & Information Technology*

*Public Telecommunication Corporation*

المجموعة الأولى

Technical Specifications for

(DROP WIRE 0.65mm)

with Schedule of Quantities

Issued 2012

## **CONTENTS**

- 1) General
- 2) Associated documents
- 3) Temperature and Environment
- 4) Construction
- 5) Materials
- 6) Electrical requirements
- 7) Mechanical requirements
- 8) Samples
- 9) Compliance
- 10) Delivery lengths
- 11) Supply experience
- 12) Inspections
- 13) Packing and marking
- 14) Data sheet
- 15) Schedule of quantities

## 1. GENERAL:

These specifications cover the construction, electrical and mechanical requirements, testing and packing of 1 pair self supporting drop wire to be installed between distribution points and telephone subscribers premises.

## 2. ASSOCIATED DOCUMENTS:

- (a) Where international standards are not available, standards in accordance with ASTM (American Society for Testing and Materials), IP (Institute of Petroleum) and BS (British Standards Institute) have been specified. The latest issues should be apply and deemed to be integral parts of the specifications.
- (b) The following standards are referred to in this specification:


ASTM B3	Conductor, Quality of copper.
ISO R402	Conductor, Tensile Strength and Elongation.
ASTM D 1248	Insulation and Sheath, Quality of polyethylene material.
ASTM D 792	Insulation and Sheath, Density.
ISO R 292	Insulation and Sheath, Melt flow index.
ISO R 527	Insulation and Sheath, Tensile strength and elongation.
ASTMD 1603	Sheath, Carbon Black Content.
MAT-061	Inspection and testing.
MAT-062	Packing and marking.

## 3. TEMPERATURE AND ENVIRONMENT

- 3.1 The drop wire should be, without detriment, maintain the physical and electrical characteristics, within specified limits detailed in this specification, over a working temperature range of -10 °C to +80 °C.
- 3.2 The drop wire should be suffering no deterioration from sunlight of corrosive elements in the atmosphere.

## 4. CONSTRUCTION:

- 4.1 The assembly should be consisting of two conductor lay parallel insulated to form a figure 8 configuration. It should be possible to separate the drop wire into two fully insulated conductors by cutting along the interconnecting web.
- 4.2 Polarity identification should be provide by a single ridge tracer longitudinally molded along the jacket throughout the inter length the drop wire unaided eye and to the touch.
- 4.3 The dimension of the drop wire should be as shown in the figure below; the thickness of the conductor insulation must be 0.65mm.

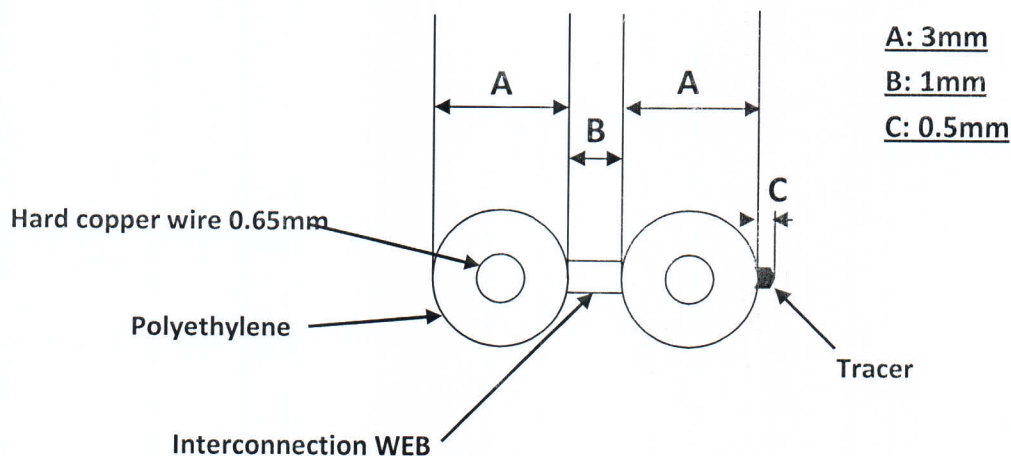

## **5. ELECTRICAL REQUIREMENTS AT 20°C**

### **5.1 Conductors:**

Each conductor should be consisting of hard drawn copper wire. The conductor should be meet the requirements of (ASTM B3) have a conductivity of at least 96%. The diameter of conductor should be 0.65mm.

### **5.2 Insulation:**

- 5.2.1 The insulation should be high density polyethylene (HDPE).
- 5.2.2 The polyethylene compound should be according to (ASTM D 1248).
- 5.2.3 The insulation should be contain 2.5% black carbon uniformly distributed along the insulation.
- 5.2.4 A finished drop wire should not be support combustion fire more than 1 minute after 15 seconds applications of standard test flame to a vertically supported specimen with interval of 15 seconds between successive applications of the flame. The specimen should not be convoy flame either during or after five applications of the test flame.

## **6. ELECTRICAL REQUIREMENTS**

- 6.1 The maximum conductor resistance should be  $52\Omega/\text{Km}$  at  $+20^\circ\text{C}$ .
- 6.2 The resistance unbalance between two conductors should not be exceeding 2%.
- 6.3 The insulation resistance at 500VDC must be  $5000\text{M}\Omega/\text{Km}$  for 1minute.
- 6.4 Dielectric strength should be 4000VAC for 3minutes.
- 6.5 The mutual capacitance measured in dry air at 800Hz on wire length should not be exceeding  $40\text{nF}/\text{km}$ .

## **7. MECHANICAL REQUIREMENTS**

All tests should be performed as specified in specification MAT-061.

### **7.1 Conductor:**

- 7.1.1 The tensile strength should be not less than  $200\text{N}/\text{mm}^2$  for 0.65mm and the maximum permanent elongation should be 2%.

### **7.2 Insulation (polyethylene):**

- 7.2.1 The maximum melt flow index should be  $0.5\text{g}/10\text{minutes}$ .
  - 7.2.2 The tensile strength should not be less than  $12.5\text{N}/\text{mm}^2$  and the ultimate elongation should not be less than 400%.
  - 7.2.3 The dielectric constant should not be exceeding 2.4 when measured at 100KHz & 1MHz.
- 7.3 The drop wire should be passing an immersion test according to (MAT-061) without breakdown.

## **8. COMPLIANCE**

The tenderer should be state their compliance with specification in figures and detailed statements any deviation suggested by manufacture should be fully documented and may be presented the word (comply) is not sufficient for this purpose.

## **9. SUPPLY EXPERIENCE**

The tenderer should be submitting document of supply experience.

## **10. DELEVERY LENGTH**

The drop wire should be delivered in coils of 500 meter in length.

## **11. SAMPLES**

- 11.1 The samples must be bringing with offer with length not less 100m.
- 11.2 The sample must be stamp by Manufacture Company.

Drop wire 0.65mm



## **12. INSPECTION**

12.1 Manufacturer should be keep suitable summary records for a period not less than five years of all electrical and physical tests required in such a form that test data.

12.2 Following test results should be supplied with each coil:

12.2.1 Conductivity.

12.2.2 Conductor resistance.

12.2.3 Resistance unbalance.

12.2.4 Mutual capacitance.

12.2.5 Capacitance unbalance.

12.2.6 Insulation resistance.

12.2.7 Dielectric strength.

12.3 PTC should have a right to depute a reprehensive to inspect at factory during the manufacture of the cable on the cost of the tenderer.

12.4 The approval to attend two PTC engineers to test the cables during the manufacture on the cost of the tenderer.


## **13. PACKING AND MARKING**

(a) Packing / unpacking instructions must be supplied along with each consignment.

(b) The packing material should not be contain any sharp edges or nails which may damage the material.

(c) A distinguishing number and the following information should be plainly marked on the outside of each coil:

- i. Manufacture's name and country of origin.
- ii. Contract number.
- iii. M.T.I.T R.Y P.T.C
- iv. Tender number.
- v. Year of manufacture.
  - i. Length in meters.
  - ii. Net and gross weights.



**NOTES:**

The tenderes must be reply to the following points:-

1. Statement of complete form manufacturing company regarding the compliance with PTC specifications.
2. Respond to and comply with PTC Technical schedules.
3. Attach the Catalogs and documents containing instructions on how to install cables.
4. Manufacturer must submit company profile and experience.
5. Manufacturer's brand name must be printed on sample(s), which must be bringing with offer.
6. The approval to attend two PTC engineers to test the cables during the manufacturing process.

ملاحظات:

على مقدم العرض الالتزام بالآتي:

- 1- الإجابة العملية من الشركة المصنعة على كل مواصفات المؤسسة ( عروض الاستجابة).
- 2- الإجابة على المواصفات الفنية الموضحة في الجداول الفنية.
- 3- إرفاق الكتالوجات والوثائق التي توضح تركيب الكابلات المطلوبة.
- 4- إرفاق الخبرة التزويدية للمصنع.
- 5- إحضار عينة (عينات) مع العرض على أن يكون مطبوعاً عليها اسم الشركة المصنعة بشكل واضح.
- 6- الموافقة على استضافة عدد (٢) مهندسين لحضور عملية الفحص المصنعي للكابلات عند التصنيع.

**REPUBLIC OF YEMEN**

**Ministry of Telecommunication & Information Technology**

**Public Telecommunication Corporation**

المجموعة الثانية

**Technical Specifications for**

**(DROP WIRE 1.0mm)**


**With Schedule of Quantities**

**Issued 2012**



## **CONTENTS**

- 1) General
- 2) Associated documents
- 3) Temperature and Environment
- 4) Construction
- 5) Materials
- 6) Electrical requirements
- 7) Mechanical requirements
- 8) Samples
- 9) Compliance
- 10) Delivery lengths
- 11) Supply experience
- 12) Inspections
- 13) Packing and marking
- 14) Data sheet
- 15) Schedule of quantities



## 1. GENERAL:

These specifications cover the construction, electrical and mechanical requirements, testing and packing of 1 pair self supporting drop wire to be installed between distribution points and telephone subscribers premises.

## 2. ASSOCIATED DOCUMENTS:

- (a) Where international standards are not available, standards in accordance with ASTM (American Society for Testing and Materials), IP (Institute of Petroleum) and BS (British Standards Institute) have been specified. The latest issues should be apply and deemed to be integral parts of the specifications.
- (b) The following standards are referred to in this specification:


ASTM B3	Conductor, Quality of copper.
ISO R402	Conductor, Tensile Strength and Elongation.
ASTM D 1248	Insulation and Sheath, Quality of polyethylene material.
ASTM D 792	Insulation and Sheath, Density.
ISO R 292	Insulation and Sheath, Melt flow index.
ISO R 527	Insulation and Sheath, Tensile strength and elongation.
ASTMD 1603	Sheath, Carbon Black Content.
MAT-061	Inspection and testing.
MAT-062	Packing and marking.

## 3. TEMPERATURE AND ENVIRONMENT

- 3.1 The drop wire should be, without detriment, maintain the physical and electrical characteristics, within specified limits detailed in this specification, over a working temperature range of -10 °C to +80 °C.
- 3.2 The drop wire should be suffering no deterioration from sunlight of corrosive elements in the atmosphere.

## 4. CONSTRUCTION:

- 4.1 The assembly should be consisting of two conductor lay parallel insulated to form a figure 8 configuration. It should be possible to separate the drop wire into two fully insulated conductors by cutting along the interconnecting web.
- 4.2 Polarity identification should be provide by a single ridge tracer longitudinally molded along the jacket throughout the inter length the drop wire unaided eye and to the touch.
- 4.3 The dimension of the drop wire should be as shown in the figure below; the thickness of the conductor insulation must be 0.65mm.

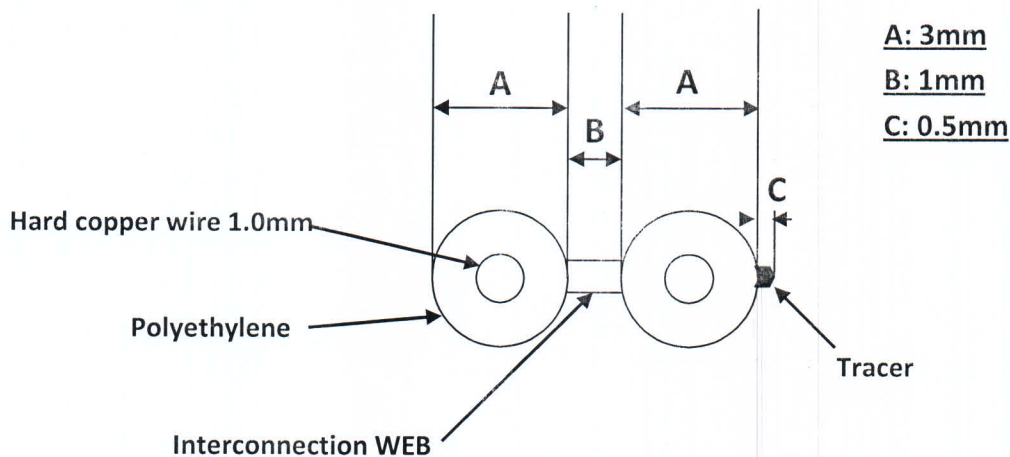

## **5. ELECTRICAL REQUIREMENTS AT 20°C**

### **5.1 Conductors:**

Each conductor should be consisting of hard drawn copper wire. The conductor should be meet the requirements of (ASTM B3) have a conductivity of at least 96%. The diameter of conductor should be 0.65mm.

### **5.2 Insulation:**

5.2.1 The insulation should be high density polyethylene (HDPE).

5.2.2 The polyethylene compound should be according to (ASTM D 1248).

5.2.3 The insulation should be contain 2.5% black carbon uniformly distributed along the insulation.

5.2.4 A finished drop wire should not be support combustion fire more than 1 minute after 15 seconds applications of standard test flame to a vertically supported specimen with interval of 15 seconds between successive applications of the flame. The specimen should not be convoy flame either during or after five applications of the test flame.

## **6. ELECTRICAL REQUIREMENTS**

6.1 The maximum conductor resistance should be  $23\Omega/\text{Km}$  at  $+20^\circ\text{C}$ .

6.2 The resistance unbalance between two conductors should not be exceeding 2%.

6.3 The insulation resistance at 500VDC must be  $5000\text{M}\Omega/\text{Km}$  for 1minute.

6.4 Dielectric strength should be 4000VAC for 3minutes.

6.5 The mutual capacitance measured in dry air at 800Hz on wire length should not be exceeding 40nF/km.

## **7. MECHANICAL REQUIREMENTS**

All tests should be performed as specified in specification MAT-061.

### **7.1 Conductor:**

7.1.1 The tensile strength should be not less than  $400\text{N}/\text{mm}^2$  for 1.0mm and the maximum permanent elongation should be 1%.

### **7.2 Insulation (polyethylene):**

7.2.1 The maximum melt flow index should be 0.5g/10minutes.

7.2.2 The tensile strength should not be less than  $12.5\text{N}/\text{mm}^2$  and the ultimate elongation should not be less than 400%.

7.2.3 The dielectric constant should not be exceeding 2.4 when measured at 100KHz & 1MHz.

7.3 The drop wire should be passing an immersion test according to (MAT-061) without breakdown.

## **8. COMPLIANCE**

The tenderer should be state their compliance with specification in figures and detailed statements any deviation suggested by manufacture should be fully documented and may be presented the word (comply) is not sufficient for this purpose.

## **9. SUPPLY EXPERIENCE**

The tenderer should be submitting document of supply experience.

## **10. DELEVERY LENGTH**



The drop wire should be delivered in coils of 500 meter in length.

## **11. SAMPLES**

11.1 The samples must be bringing with offer with length not less 100m.

11.2 The sample must be stamp by Manufacture Company.

Drop wire 1.0mm

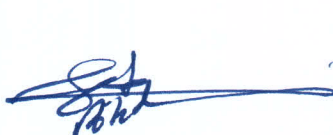


## **12. INSPECTION**

- 12.1 Manufacturer should be keep suitable summary records for a period not less than five years of all electrical and physical tests required in such a form that test data.
- 12.2 Following test results should be supplied with each coil:
- 12.2.1 Conductivity.
  - 12.2.2 Conductor resistance.
  - 12.2.3 Resistance unbalance.
  - 12.2.4 Mutual capacitance.
  - 12.2.5 Capacitance unbalance.
  - 12.2.6 Insulation resistance.
  - 12.2.7 Dielectric strength.
- 12.3 PTC should have a right to depute a reprehensive to inspect at factory during the manufacture of the cable on the cost of the tenderer.
- 12.4 The approval to attend two PTC engineers to test the cables during the manufacture on the cost of the tenderer.

## **13. PACKING AND MARKING**

- (a) Packing / unpacking instructions must be supplied along with each consignment.
- (b) The packing material should not be contain any sharp edges or nails which may damage the material.
- (c) A distinguishing number and the following information should be plainly marked on the outside of each coil:
- i. Manufacture's name and country of origin.
  - ii. Contract number.
  - iii. M.T.I.T R.Y P.T.C
  - iv. Tender number.
  - v. Year of manufacture.
    - i. Length in meters.
    - ii. Net and gross weights.

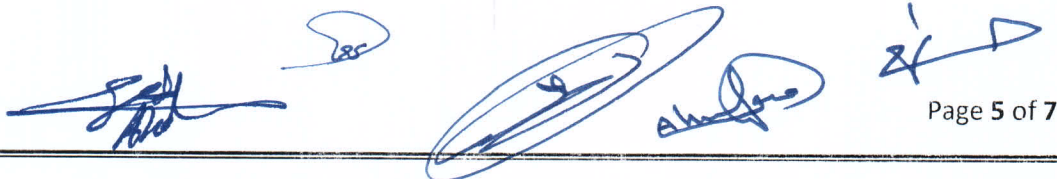The bottom of the page contains several handwritten signatures and initials in blue ink. On the left, there is a signature that appears to be 'S. H. H.'. In the center, there is a signature that looks like 'S. H. H.' with a large flourish. To the right, there is a signature that looks like 'S. H. H.' with a large flourish. On the far right, there are initials that look like 'S. H. H.' with a large flourish.

*Information to be submitted with the tender:-*

Tenderers should be give details of the construction of drop wire physical, electrical characteristics and mechanical characteristics relating to the concerned tender in the form given in the table below:-

characteristics	Tender Offer
<b>1- CONSTRUCTION:-</b>	
1.1 Conductor material	
1.2 conductor diameter (mm)	
1.3 Insulation material	
1.4 Insulation thickness (A, B, C)	
1.5 Black carbon content %	
1.6 weight of copper per 500m of conductor	
1.7 overall weight of roll (500m) Kg	
1.8 Marking	
1.9 standard length of roll(m)	
<b>2. ELECTRICAL CHARACTERISTICS AT 20°C</b>	
2.1 conductivity of conductor%	
2.2 Max conductor resistance $\Omega$ /Km	
2.3 Resistance unbalance /Km	
2.4 Insulation resistance at (500 VDC)	
2.5 Dielectric strength	
2.6 Mutual capacitance at 800KHz	
2.7 Nominal characteristic impedance	
2.8 Maximum insertion loss (dB/Km) at:	
- 1KHz	
- 150 KHz	
- 300 KHz	
<b>3. MECHANICAL CHARACTERISTICS</b>	
3.1 Tensile strength of conductor	
3.2 Elongation of conductor	
3.3 Tensile strength of insulation	
3.4 Elongation of insulation	
3.5 Operating temperature & relative humidity	
<b>4. SAMPLE</b>	
4.1 length of sample	

\*\*\* END OF SPECIFICATIONS\*\*\*

**NOTES:**

The tenderes must be reply to the following points:-

1. Statement of complete form manufacturing company regarding the compliance with PTC specifications.
2. Respond to and comply with PTC Technical schedules.
3. Attach the Catalogs and documents containing instructions on how to install cables.
4. Manufacturer must submit company profile and experience.
5. Manufacturer's brand name must be printed on sample(s), which must be bringing with offer.
6. The approval to attend two PTC engineers to test the cables during the manufacturing process.

ملاحظات:

على مقدم العرض الالتزام بالآتي:

- 1- الإجابة العملية من الشركة المصنعة على كل مواصفات المؤسسة ( عروض الاستجابة).
- 2- الإجابة على المواصفات الفنية الموضحة في الجداول الفنية.
- 3- إرفاق الكتالوجات والوثائق التي توضح تركيب الكابلات المطلوبة.
- 4- إرفاق الخبرة التزويدية للمصنع.
- 5- إحضار عينة (عينات) مع العرض على أن يكون مطبوعاً عليها اسم الشركة المصنعة بشكل واضح.
- 6- الموافقة على استضافة عدد (2) مهندسين لحضور عملية الفحص المصنعي للكابلات عند التصنيع.

## جدول الكميات لعدد (٤٠٠٠) لفة دروب واير

م	الصف	الكمية	سعر اللفة بالدولار	اجمالي التكلفة التقديرية للكمية بالدولار
المجموعة الأولى	دروب واير ٦٥,٠٠ ملم	٣,٠٠٠ لفة		
المجموعة الثانية	دروب واير ١ ملم	١,٠٠٠ لفة		

